



IWM-PL4

Electronic pulse emitter module
for Woltmann meters with
inductive interface

The IWM-PL4 is suitable for remote reading applications in commercial and industrial sectors, acting as an electronic pulse-emitter.

It allows the acquisition of the consumption of the counter by third-party systems with a universal interface and integrating advanced counting functions and fraud detections.

The use of an inductive target at the counter excludes the possibility of magnetic fraud and makes the application insensitive to the pipes vibrations.

The IWM-PL4 is compatible with all the pre-equipped Woltmann meters.

Consumption analysis (with incremental and decremental counting), Reverse flow compensation can be activated for an always perfect alignment between the counter and counter clock.

Checking frauds (cable cut and removal, application of external magnetic field, reverse flow). The presence of reverse flow can be monitored with a dedicated impulse contact.

Dedicated dosing function available for industrial applications.

IP68 protection* allows the use of the module also for meters installed in harsh environments.

NFC interface allows high flexibility of configuration, allowing setting of the output pulse ratio in total autonomy through smartphone app (available ratio values: multiples of the index value), and being able to configure the duration of the output pulse according to the sensitivity of the acquisition system.



TECHNICAL FEATURES

Output signal	Supply: maximum 30VDC (100mA) Type: polarized open-collector
Cable length	1.5 meters (4 conductors)
Compatible water meters	WDE-K50
Pulse output minimum value (K)	10 liters (up to DN125) or 100 liters (from DN150)
Energy supply	Non-replaceable lithium battery, max lifetime 10 years*
Protection class	IP68**
Weight	160 g
Size (L x P x H, cable excluded)	100 x 100 x 25 mm
Working temperature	1°C – +55°C
Module programming requirements	Android device (smartphone, tablet, etc.) with a NFC interface and the NFC IWM Config APP freely downloadable from GOOGLE PLAY

* The battery life strongly depends on the working time window, set during the configuration process, and on the environmental conditions.

** IP68: maximum 24 hours of continuous submersion at 1 m depth.

WHITE

Simple counting wire, NO contact Closes every index revolution, independently from the flow direction.

YELLOW

Fraud wire, NC contact, Opens at the following alarm conditions: Module removal, Inductive target tampering, Cable cut, Magnetic tampering.

GREEN

Third wire, NO contact, it can be assigned to one of the following features: Absolute counting (closes every index revolution during forward flow, with backward flow revolution compensation), Backward counting (closes every revolution during back flowing), Dosing (closes every XX liter, with XX freely settable).

BROWN

Ground (common wire).

DESIGNING, PRODUCING AND DISTRIBUTING SOLUTIONS FOR OVER 25 YEARS

B METERS is an Italian company that has been designing, producing and distributing instruments and solutions for measuring the consumption of water and thermal energy used for heating and cooling, for over 25 years.


The yearly production currently exceeds 2M units, putting B METERS in a leading position both at national and European level.

The product range includes turbine (velocity) type single and multi-jet water meters with mechanical or magnetic transmission, Woltmann meters, irrigation meters, flow meters, thermal energy meters and heat cost allocators with direct reading, or complete with integrated modules for the remote transmission of the consumption data.



EN 1434

EN 834

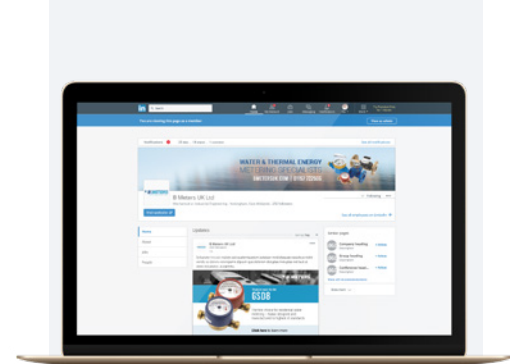

**FOLLOW BMETERS ON LINKEDIN,
KEEP UP-TO-DATE WITH ALL
LATEST NEWS AND PRODUCT
INFORMATION**

THE BMETERS RANGE



WATER METERS



THERMAL ENERGY METERS



READING SYSTEMS



M-BUS SOLUTIONS