

TS201

Temperature Sensor
Featuring LoRaWAN®



◆ Temperature Sensing Redefined

TS201 is a compact temperature and humidity sensor. It is equipped with high-precision sensors and an IP67 waterproof design, making it applicable for accurate temperature data detection in various harsh environments. With the low power consumption technology, TS201 can maintain a long operational life with its internal battery. When combined with Milesight LoRaWAN® gateway and Milesight Development Platform solution, users can manage all sensor data remotely and visually. TS201 is widely used for temperature and humidity monitoring applications like cold chain storage of food or medicine, etc.

◆ Features

- Equipped with high accuracy DS18B20 temperature probe or TH temperature - humidity probe
- Detachable probe for self-calibration
- IP67 waterproof with specialized battery compartment design, making it suitable for harsh environment
- Equipped with indicator to indicate device status and threshold alarms (TH Version Only)
- Flexible design support various mounting options
- EN12830 certified for cold-chain applications
- Stores up to historical records locally and support retransmission to prevent data loss
- Equipped with NFC for quick and easy configuration
- Function effectively with standard LoRaWAN® gateways and network servers
- Compatible with Milesight Development Platform
- Supports Milesight D2D protocol to enable ultra-low latency and direct control without gateways (TH Version Only)
- Supports Firmware Update Over the Air (FUOTA) feature (TH Version Only)




◆ Specifications

| Model | Temperature Version | TH Version |
|-----------------------|--|---|
| Connector Type | 5-Pin M12 A-Coded Male Connector | |
| Connector Number | 1 × Connector for DS18B20 Sensor | 1 × Connector for TH Sensor |
| Sensor | | |
| Sensor Type | DS18B20 | Digital CMOSens® technology (MEMS) |
| Temperature | | |
| Measuring Range | -40℃ ~ 125℃ | |
| Accuracy | Typ.: ± 0.5℃(10℃ ~ 85℃), ± 2℃(-40℃ ~ -10℃, 85℃ ~ 125℃) | Typ.: ± 0.3℃(-40℃~ 0℃) ± 0.2℃(0℃~ 60℃) ± 0.5℃(60℃~ 125℃) |
| Resolution | 0.1℃ | |
| Long-term Drift | Typ.< 0.2℃ (125℃, VDD=5.5V, 1000h) | Typ. < 0.03℃/year |
| Humidity | | |
| Measuring Range | / | 0% ~ 100% RH |
| Accuracy | | Typ.: ±2% (0% ~ 100% RH) |
| Resolution | | 0.5% RH |
| Long-term Drift | | Typ.: < 0.2% RH/year |
| Wireless Transmission | | |
| Technology | LoRaWAN® | LoRaWAN®, Milesight D2D |
| Frequency | CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4 | |
| Tx Power | 16dBm (868MHz)/22dBm (915MHz)/19dBm (470MHz) | |
| Sensitivity | -137dBm @300bps | |
| Mode | OTAA/ABP Class A | |
| Others | | |
| LED Indicator | 1 × Status Indicator | |

| | | |
|---|---|---|
| Button | / | 1 × External Power Button |
| Configuration | Mobile App (via NFC) or Downlink | |
| Advanced Feature | Data Retransmission, Data Retrievability, Abrupt Change Alarm | |
| | Data Storage (2800 entries) | Data Storage (4000 entries), Milesight D2D Controller, Milesight D2D Data Transmission |
| Physical Characteristics | | |
| Power Supply | 1 × 2700 mAh ER14505 Li-SOCl ₂ Battery | |
| Battery Life ¹ (10 min Interval, 25°C) | Around 8.2 Years (SF7, EU868&US915) Around 2.7 Years (SF10, EU868&US915) | Around 9 Years (SF7, EU868) Around 2.8 Years (SF10, EU868) Around 10 Years (SF7, US915) Around 3 Years (SF10, US915) |
| Operating Temperature | TS201 Device: -30°C ~ 55°C (-22°F ~ 131°F) | |
| Relative Humidity | 0% ~ 95% (Non-condensing) | |
| Ingress Protection | IP67 | |
| Housing&Color | TS201 Device: ABS+PC & White Sensor Cable: TPE & White | |
| | Sensor Probe: Stainless Steel 316 (Food Grade) | Sensor Probe: Stainless Steel 304 (Food Grade) |
| Weight | TS201 Device: 70g | |
| | Sensor Cable+Probe: 25g | Sensor Cable+Probe: 26.5g |
| Length | Sensor Cable: 1.5m | |
| | Sensor Probe: 50mm | |
| Dimension | 58 × 65 × 25 mm (2.28 × 2.56 × 0.98 in) | |
| Installation | Wall Screw Mounting, Cable-tie Mounting, Magnetic Mounting (Opt.) | |
| Approvals | | |
| Regulatory | CE, FCC, EN12830 | |
| Environmental | RoHS | |

¹Tested under laboratory conditions and for guideline purposes only.

◆ Dimensions

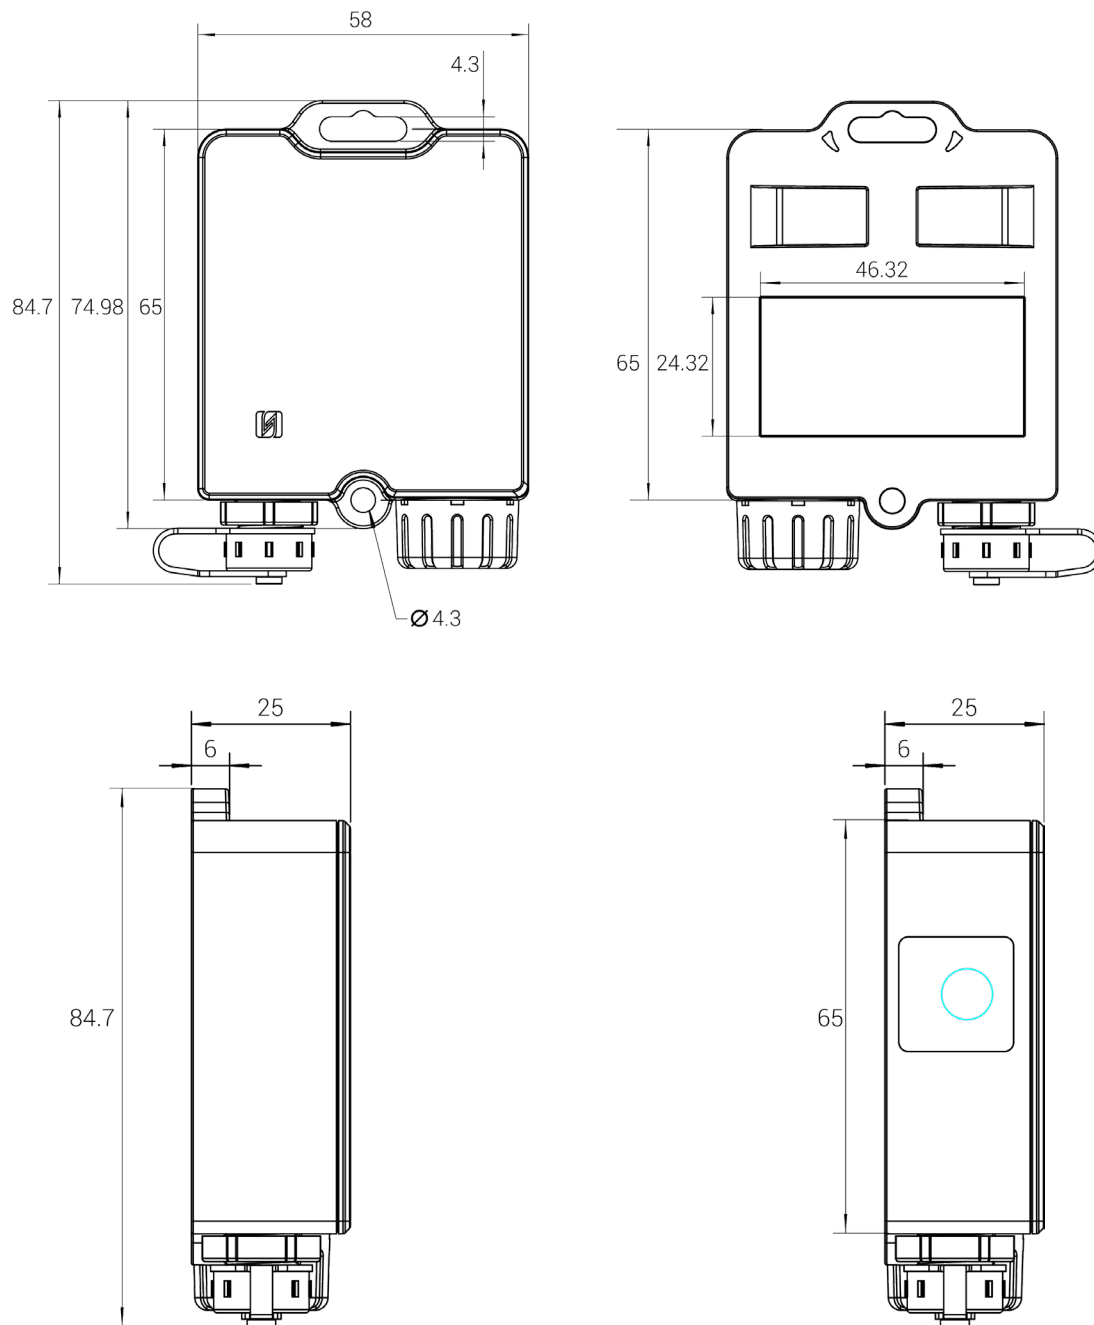

Temperature Version

TH Version

To alert the support team about any issues you are experiencing, please send an email to or create a ticket in our support platform. Please click here: technical@bmetersuk.com

The support team will get back to you as soon as possible.

